



Point of Use



SERIES 10/2



Pony water heaters are ideal for the rapid and inexpensive production of small quantities of water. They can be installed above or below the sink (30 Litres above only). Space-saving design for installation in limited spaces.

- Steel tank, glass-lined "Blue Glass 4753" using flow-coating method 850°C, WRAS (BS6920-1) certified
- Corrosion-proof magnesium anode
- Screw-in heating element in copper, fitted on a 1"¼ coupling
- Regulation and safety rod thermostat
- IPX5 protective cover over electrical parts
- Neopor® insulating shells for reduced heat loss
- Shock-resistant polypropylene casing and back
- Brackets for wall mounting available upon request
- LED heating lamp shows that the heating cycle is in progress




WARRANTY:

- 2 YEARS ON THE TANK AND COMPONENTS

TECHNICAL DATA	U.M.	Pony 10/2	Pony 10/2 s	Pony 15/2	Pony 15/2 s	Pony 30/2
Capacity	l	10	10	15	15	30
Code	/	171513	171514	171515	171516	171517
Warranty	/	2	2	2	2	2
Power	kW	1,2	1,2	1,2	1,2	1,2
Voltage	V~	230	230	230	230	230
Heating time (ΔT50 °C)	min.	30	30	46	46	92
ErP Energy Class	ErP	B	B	B	B	C
ErP Test profile		XXS	XXS	XXS	XXS	S
Max. operating temperature	°C	75	75	75	75	75
Max. operating temperature	MPa	0,8	0,8	0,8	0,8	0,8
Net weight	kg	6,0	6,0	7,5	7,5	10,0
Hydraulic connections (KW-WW)	G	½"	½"	½"	½"	½"

Oversink version 10-15-30

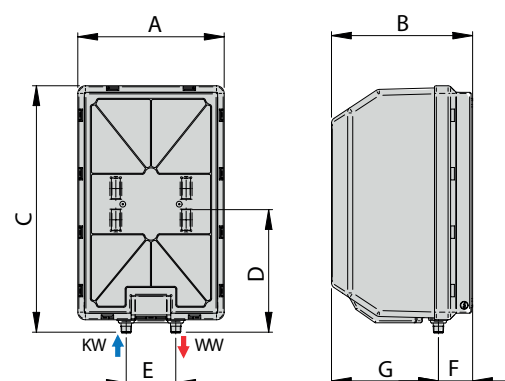

Dimensions	U.M.	A	B	C	D	E	F	G
10/10s	mm	261/261	251/251	450/450	228/250	100/100	62/62	189/189
15/15s	mm	296/296	285/285	498/498	248/270	100/100	69/69	216/216
30	mm	366	355	568	384	100	89	266

Notes: s = undersink version

Undersink version 10-15

