



Wall-hung Thermo

SERIES VF/T 50-80-100

ErP Energy Class


C



Wall-hung storage water heaters are designed to satisfy the most varied market requirements. Also recommended for industrial and collective use.



- Steel tank, glass-lined "Blue Glass 4753" using flow-coating method 850°C, WRAS (BS6920-1) certified
- Corrosion-proof magnesium anode
- Screw-in heating element in copper, fitted on a 1" ¼ coupling
- Regulation and safety rod thermostat
- Rigid polyurethane (PU) insulation layer
- External casing made of sheet metal coated with epoxy powder paint
- LED heating lamp shows that the heating cycle is in progress
- IPX4 protective cover on electrical parts
- Stored water temperature indicator

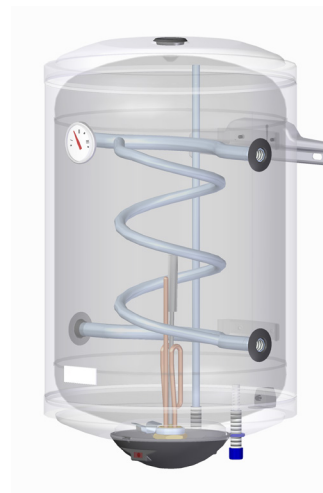

WARRANTY:

- 5 YEARS ON THE TANK
- 2 YEARS ON THE OTHER COMPONENTS

TECHNICAL DATA	U.M.	VF/T 50	VF/T 80	VF/T 100
Capacity	l	50	80	100
Code	/	171867	171868	171869
Warranty	/	2+3	2+3	2+3
Power	kW	1,2	1,2	1,2
Voltage	V~	230	230	230
Heating time (ΔT50 °C)	min.	153	245	306
ErP Energy Class	ErP	C	C	C
ErP Test profile		M	M	L
Max. operating temperature	°C	75	75	75
Max. operating pressure	MPa	0,8	0,8	0,8
Net weight	kg	17,0	23,5	27,5
Hydraulic connections (KW-WW)	G	½"	½"	½"
Hydraulic connections (PV-PR)	RP	½"	½"	½"
Dimensional values: A	mm	511	742	893
Dimensional values: B	mm	288	518	670
Dimensional values: C	mm	220	220	200
Dimensional values: D	mm	107	338	352

