



Lux Version

SERIES VF 50÷100 e VF 50-100 SE

ErP Energy Class

C



Wall-hung storage water heaters are designed to satisfy the most varied market requirements. The external control knob (SE) makes it easy to adjust the water temperature. Also recommended for industrial and collective use.

SERIES VF



- Steel tank, glass-lined "Blue Glass 4753" using flow-coating method 850°C, WRAS (BS6920-1) certified
- 88 mm tank inspection flange (SE Version)
- Corrosion-proof magnesium anode
- Screw-in heating element in copper, fitted on a flange
- Regulation and safety rod thermostat, with external control knob (SE Version)
- Rigid polyurethane (PU) insulation layer
- External casing made of sheet metal coated with epoxy powder paint
- LED heating lamp shows that the heating cycle is in progress
- **IPX4 protective cover on electrical parts**
- Stored water temperature indicator

SERIES VF-SE




WARRANTY:

- 5 YEARS ON THE TANK


- 2 YEARS ON THE OTHER COMPONENTS

TECHNICAL DATA		U.M.	SERIES VF 50÷100			SERIES VF 50÷100 SE INSPECTION FLANGE AND EXTERNAL KNOB		
			VF 50	VF 80	VF 100	VF 50 SE	VF 80 SE	VF 100 SE
Capacity		l	50	80	100	50	80	100
Code		/	171862	171863	171864	171859	171860	171861
Warranty		/	2+3	2+3	2+3	2+3	2+3	2+3
Power		kW	1,2	1,2	1,2	1,2	1,2	1,2
Voltage		V~	230	230	230	230	230	230
Heating time (ΔT50 °C)		min.	153	245	306	153	245	306
ErP Energy Class			C	C	C	C	C	C
ErP Test profile			M	M	L	M	M	L
Max. operating temperature		°C	75	75	75	75	75	75
Max. operating pressure		MPa	0,8	0,8	0,8	0,8	0,8	0,8
Net weight		kg	15,1	21,8	25,5	15,5	20,5	25,5
Hydraulic connections (KW-WW)		G	½"	½"	½"	½"	½"	½"
Dimensional values: A/B		mm	511/288	742/518	893/670	511/288	742/518	893/670
Dimensional values: C/D		mm	270/450	270/450	270/450	-	-	-
Dimensional values: E/F		mm	476/125	476/125	476/125	-	-	-

SERIES VF 50÷100

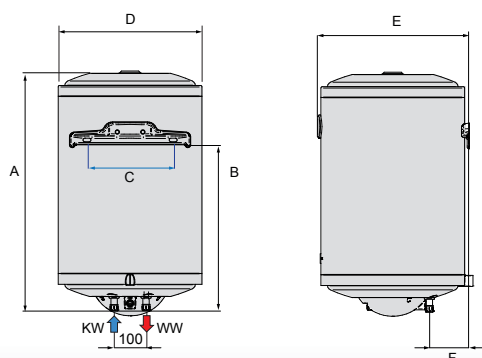

SERIES VF 50÷100 SE

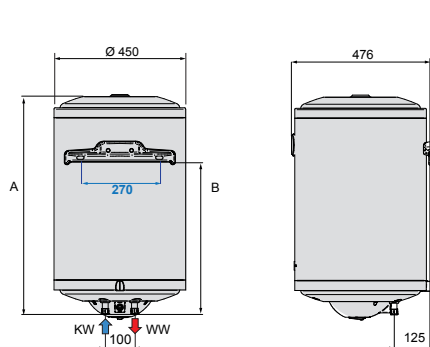

External Control Knob

